

67ATX

4x4 TRACTOR
170 HP (127 KW) / 160 HP (119KW)



Game Equipment LLC 3322 Hwy 308 Napoleonville, LA USA 70390-8904 Ph: 985-369-9292 Fax: 985-369-9595 www.gameeq.com

67ATX

4x4 TRACTOR 170 HP (127 KW) / 160 HP (119KW)



Engine and transmission coolers, with 8 fins per inch, spacing reduce buildup of debris. Hood rolls up for easy cleaning.



Individual gauges and indicators simplify operation, troubleshooting, and repair.



GAME tractors are designed and manufactured from the ground up for the most demanding conditions the world has to offer. Industrial frames, belly pans, drivelines, powertrain components, and hitches are standard.



Tilting platform and hood provide unmatched access to engine, cooler and cab components. Both work via hand pump even when systems are down.



Hood profile provides excellent visibility.



Built to withstand extreme applications, the frame accommodates multiple hitch configurations for high weight transfer, winches, and other equipment.

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

67ATX 4x4 TRACTOR 170 HP (127 KW) / 160 HP (119KW)

ENGINE

John Deere 6068, 170HP (127KW)
@ 2,500 RPM, 447 LB-FT (606 NM) @ 1,200 RPM
Mechanical fuel Injection System
Severe dust, dry dual stage air cleaner with service indicator and pre-cleaner
Fuel/water separator with secondary fuel filter
Large tropical radiator, transmission, and hydraulic oil coolers are 8 fins/inch and rubber isolator mounted
87-gal steel fuel tank with lockable cap and 12-inch clean out door

Manual hydraulic tilting hood allows easy cleaning of coolers and service of engine and under hood parts

Optional: Cummins QSB4.5, US EPA Tier III, EU Stage III 160HP (119 KW) @ 2,200 RPM with 168 HP (125 KW) @ 2,000 RPM bulge, Peak Torque of 460 FT-LB (624 NM) @ 1,500 RPM

TRANSMISSION

Manually controlled, converter driven, 4-speed powershift

Powershift allows shifting under full engine power
Spring applied hydraulic release parking brake on output shaft

Separate cooler/system isolates transmission from hydraulic system contamination

Optional: 6-speed converter driven, electronically controlled powershift transmission

AXLES

All wheels are powered
Heavy duty, planetary, dual reduction
Oscillating front axle, rigid rear axle
No spin rear and limited slip front differentials
Internal oil bath service brakes
Heavy duty mechanics drivelines

CHASSIS

Heavy duty, welded frame
Articulating joint with heavy duty, radial spherical bearing and large hardened pins
Dual double acting heavy duty welded hydraulic steering cylinders with bushings
Full belly pans and front pull hook
Painted with yellow gloss finish

STANDARD EQUIPMENT

Engine oil pressure gauge and indicator
Engine coolant temperature gauge and indicator
Voltage gauge
Fuel gauge
Tachometer with hour meter
Low hydraulic oil level light/indicator
Transmission oil temperature gauge and indicator
Transmission pressure gauge and indicator
Oil filter service warning light/indicator
Hand and foot throttle

ELECTRICAL

(2) 12-Volt DC, 925 CCA, Group 31XHE heavy duty commercial batteries
12-Volt DC, 160-Amp alternator
Horn, reverse alarm, and master disconnect switch
Four LED headlights in hood
Two adjustable front and four rear/side work lights
Two LED work lights in rear bumper
Brake and indicator lights in rear bumper with warning lights top of cab (viewable front and rear)
Strobe light

OPERATOR'S STATION

Open station with welded steel canopy top
Fully adjustable suspension seat with armrests
Adjustable tilt steering column
Manual hydraulic tilting platform
Optional: Air conditioned cab with AM/FM stereo
Air suspension seat

HYDRAULIC SYSTEM

Open center pump for brakes, steering, and implement valve
39-gal pressurized hydraulic tank with 100% filtration and 12-inch clean out door
Cable operated 2-bank implement valve
Accumulator for emergency braking

MISC OPTIONS




Rear windshield wiper and washer (with cab option)
Cable operated 4-bank control valves
Air compressor, tank, trailer park and service brakes via foot and lever
7-pin electrical connector capable of multiple trailer operation
Hydraulic brake ports on rear for trailer
Heavy duty, fixed/swinging drawbar
Heavy duty, fixed/swinging drawbar with three hitch heights
Welded rear extension with pintle hook
Category II, 3-point hitch
PTO
Front push bumper and blades
Electronic steering and mapping
Operator tool set with lockable tool box
Fire extinguisher
First aid kit
Drinking water container

TIRES

18.4 X 30, R1, 8-PLY front and rear tires
Heavy duty one piece rims
Optional: 460/85R30, R-1W
18.4X30, R2, 10-PLY
460/85R38, R-1W
18.4R38, R2
23.1X26, R1, 12-PLY


GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

67ATX 4x4 TRACTOR 170 HP (127 KW) / 160 HP (119KW)

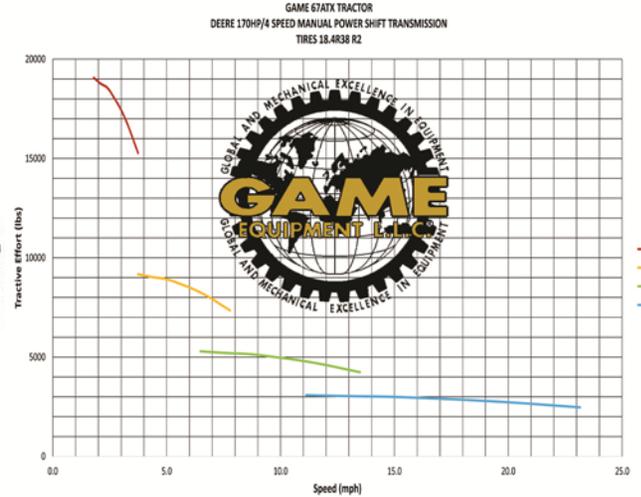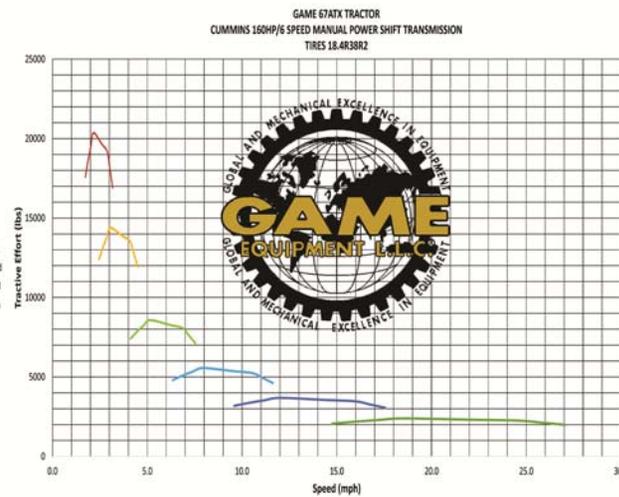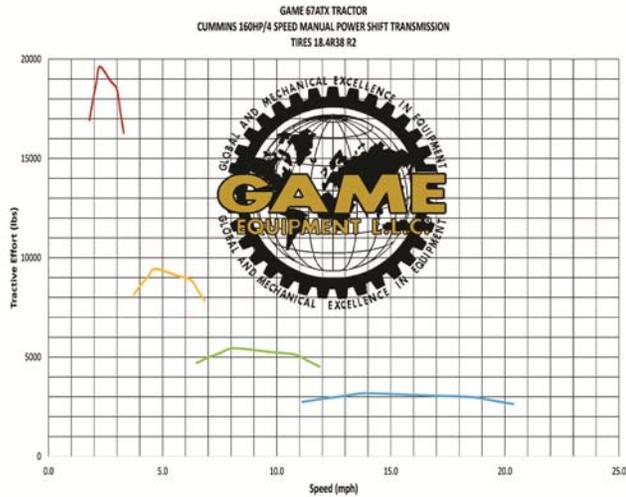

Specifications:

Unladen Tractor Weight 18,000–20,000 lbs (8,165-9,072 kg)
Unladen Weight Distribution 58% Front Axle, 42% Rear Axle

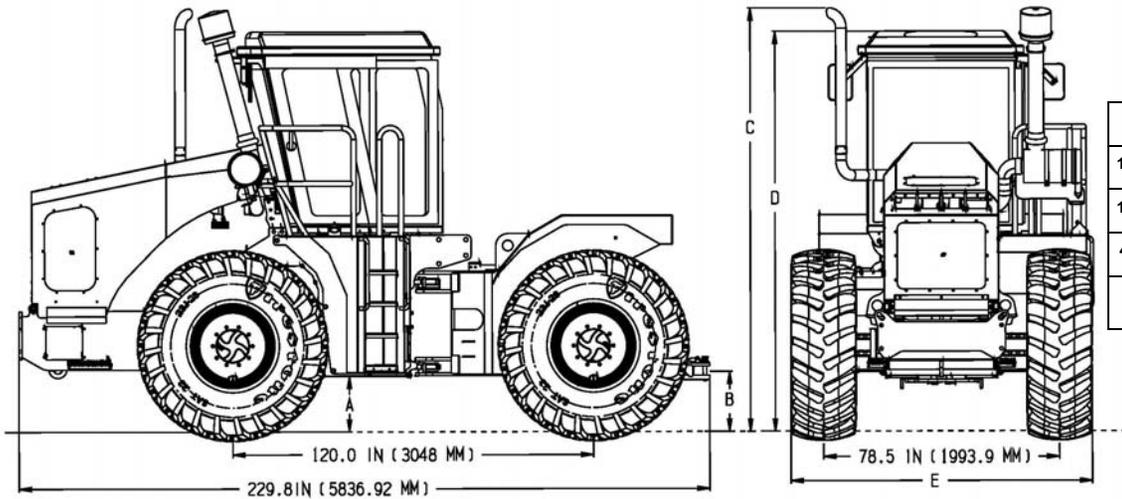

TIRE SIZE	A—IN(MM)	B—IN(MM)	C—IN(MM)	D—IN(MM)	E—IN(MM)
18.4X30 R1 8PLY	17.4 (441.9)	18.9 (480.1)	139.6 (3545.8)	131.8 (3347.7)	96.8 (2458.7)
16.9X30 R1 8PLY	16.1 (408.9)	17.6 (447)	138.3 (3512.8)	130.5 (3314.7)	95.4 (2423.7)
460/85R30 R-1W	17.3 (439.4)	18.8 (477.5)	139.9 (3553.5)	131.7 (3345.2)	97.2 (2468.9)
23.1X26 R1 12PLY	18.4 (467.4)	19.9 (505.5)	140.6 (3571.2)	132.8 (3373.1)	100.1 (2542.5)

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.