

# 65ATX

4x4 TRACTOR  
125 HP (93 KW) / 121 HP (90 KW)



Game Equipment LLC 3322 Hwy 308 Napoleonville, LA USA 70390-8904 Ph: 985-369-9292 Fax: 985-369-9595 [www.gameeq.com](http://www.gameeq.com)

# 65ATX

## 4x4 TRACTOR 125 HP (93 KW) / 121 HP (90 KW)

### ENGINE

John Deere 4045T, 125 HP (93 KW) @ 2,400 RPM, 332 FT-LB (450 NM) @ 1,400 RPM Mechanical fuel injection system

Severe dust, dry, dual stage air cleaner with service indicator and pre-cleaner

Fuel/water separator with secondary fuel filter

Large tropical radiator, transmission, and hydraulic oil coolers are 8 fins/inch and rubber isolator mounted 87-gal steel fuel tank with lockable cap and 12-inch clean out door

Manual hydraulic tilting hood allows easy cleaning of coolers and service of engine & under hood parts

**Optional** Cummins QSB4.5, Electronic fuel injection, US EPA Tier III, EU Stage III  
121HP (90 KW) @ 2,200 RPM, 347 FT-LB (470 NM) @ 1,500 RPM

### TRANSMISSION

Manually controlled, converter driven, 4-speed powershift

Powershift allows shifting under full engine power

Spring applied hydraulic release parking brake on output shaft

Separate cooler/system isolates transmission from hydraulic system contamination

**Optional:** 6-speed converter driven, electronically controlled powershift transmission

### AXLES

All wheels are powered

Heavy duty, planetary, dual reduction

Oscillating front axle, rigid rear axle

No spin rear and limited slip front differentials

Internal oil bath service brakes

Heavy duty mechanics drivelines

### CHASSIS

Heavy duty welded frame

Articulating joint with heavy duty radial spherical bearing and large hardened pins

Dual double acting heavy duty welded hydraulic steering cylinders with bushings

Full belly pans and front pull hook

Painted with yellow gloss finish

### STANDARD EQUIPMENT

Engine oil pressure gauge and indicator

Engine coolant temperature gauge and indicator

Voltage gauge

Fuel gauge

Tachometer with hour meter

Low hydraulic oil level light/indicator

Transmission oil temperature gauge and indicator

Transmission pressure gauge and indicator

Oil filter service warning light/indicator

Hand and foot throttle

### ELECTRICAL

(2) 12-Volt DC, 925 CCA, Group 31XHE heavy duty commercial batteries

12-Volt DC, 160-Amp alternator

Horn, reverse alarm and master disconnect switch

Three LED headlights in hood

Two adjustable front and four rear/side work lights

Two LED work lights in rear bumper

Brake and indicator lights in rear bumper with warning lights top of cab (viewable front and rear)

Strobe light

### OPERATOR'S STATION

Open station with welded steel canopy top

Fully adjustable suspension seat with armrests

Adjustable tilt steering column

Manual hydraulic tilting platform

**Optional:** Air conditioned cab with AM/FM stereo

Air suspension seat

### HYDRAULIC SYSTEM

Open center pump for brakes, steering, and implement valve

39-gal pressurized hydraulic tank with 100% filtration and 12-inch clean out door

Cable operated 2-bank implement valve

Accumulator for emergency braking

### MISC OPTIONS

Rear windshield wiper & washer (with cab option)

Cable operated 4-bank control valves

Air compressor, tank, trailer park and service brakes via foot & lever

7-pin electrical connector capable of multiple trailer operation

Hydraulic brake ports on rear for trailer

Heavy duty fixed/swinging drawbar

Heavy duty fixed/swinging drawbar with three hitch heights

Welded rear extension with pintle hook

Category II, 3-point hitch

PTO

Front push bumper and blades

Electronic steering and mapping

Operator tool set with lockable tool box

Fire extinguisher

First aid kit

Drinking water container

### TIRES

18.4 X 30, R1, 8-PLY front and rear tires

Heavy duty one piece rims

**Optional:** 16.9 X 30, R1, 8-Ply

460/85R30, R-1W

18.4 X 30, R2, 10-PLY

460/85R38, R-1W


18.4R38, R2

23.1 X 26, R1, 12-PLY

*GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.*

# 65ATX

4x4 TRACTOR 125 HP (93 KW) / 121 HP (90 KW)

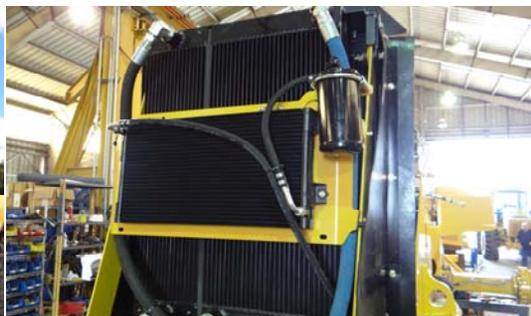


Engine and transmission coolers with 8 fins per inch spacing reduce buildup of debris. Hood rolls up for easy cleaning.



Individual gauges and indicators simplify operation, troubleshooting, and repair.



***GAME tractors are designed and manufactured from the ground up for the most demanding conditions the world has to offer. Industrial frames, belly pans, drivelines, powertrain components, and hitches are standard.***

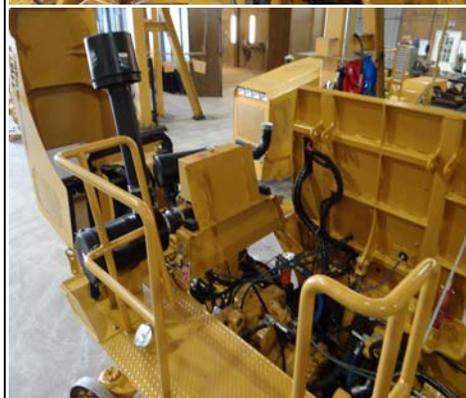

Tilting platform and hood provide unmatched access to engine, cooler and cab components. Both work via hand pump even when systems are down.






Hood profile provides excellent visibility.



Built to withstand extreme applications, the frame accommodates multiple hitch configurations for high weight transfer, winches, and other equipment.

*GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.*


# 65ATX 4x4 TRACTOR 125 HP (93 KW) / 121 HP (90 KW)

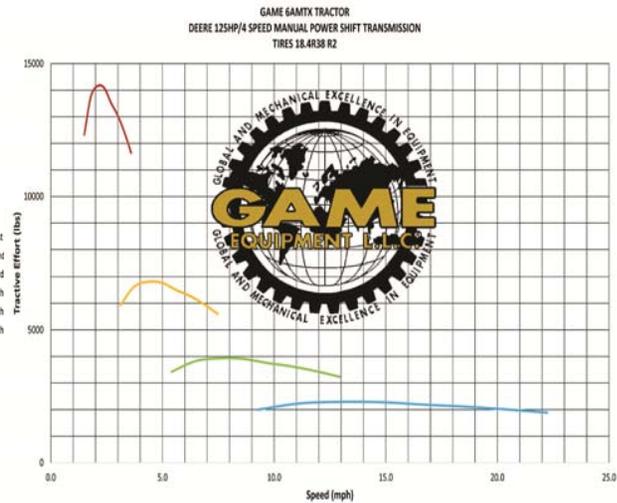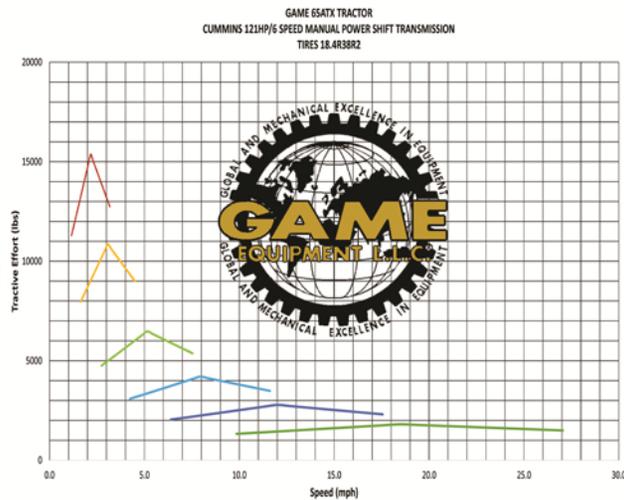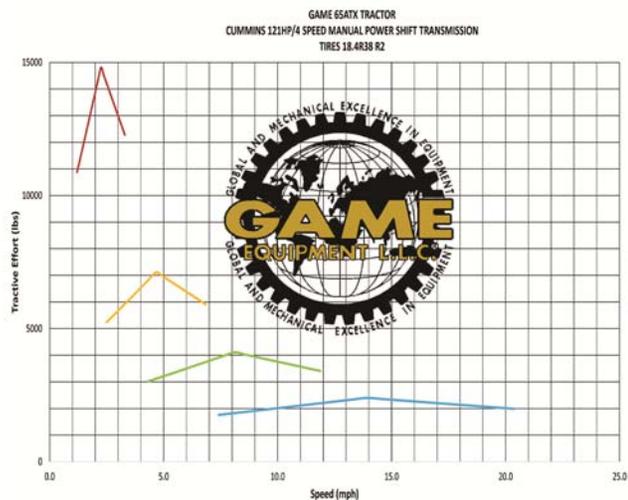

## Specifications:

**Unladen Tractor Weight** 17,000–19,000 lbs (7,711-8,618 kg)

**Unladen Weight Distribution** 58% Front Axle 42% Rear Axle

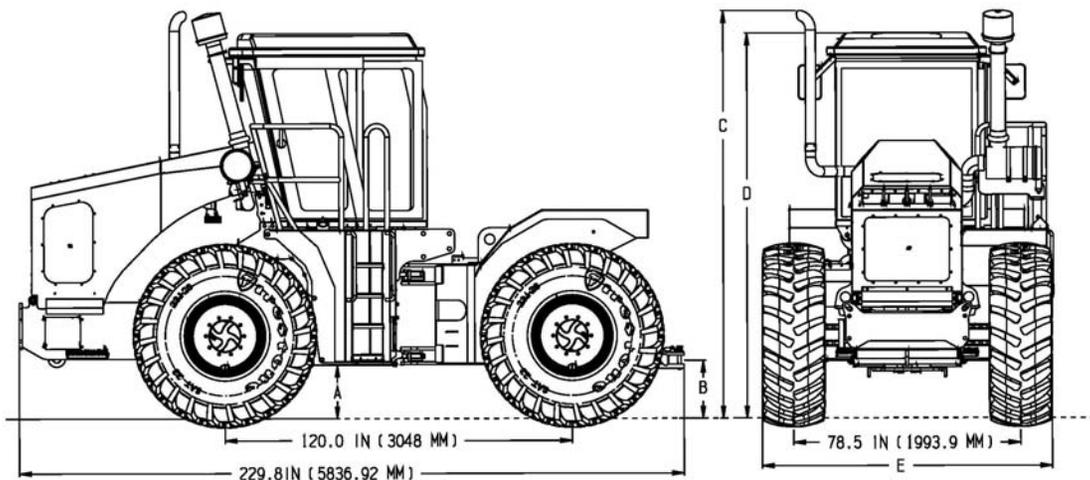

TIRE SIZE	A—IN(MM)	B—IN(MM)	C—IN(MM)	D—IN(MM)	E—IN(MM)
18.4X30 R1 8PLY	17.4 (441.9)	18.9 (480.1)	139.6 (3545.8)	131.8 (3347.7)	96.8 (2458.7)
16.9X30 R1 8PLY	16.1 (408.9)	17.6 (447)	138.3 (3512.8)	130.5 (3314.7)	95.4 (2423.7)
460/85R30 R-1W	17.3 (439.4)	18.8 (477.5)	139.9 (3553.5)	131.7 (3345.2)	97.2 (2468.9)
18.4X30 R2 8PLY	17.8 (452.1)	19.3 (490.2)	140 (3556)	132.2 (3357.9)	96.8 (2458.7)
460/85R38 R-1W	21.3 (541)	22.8 (579.1)	143.5 (3644.9)	135.7 (3446.8)	97.2 (2468.9)
18.4R38 R2	21.9 (556.3)	23.4 (594.4)	144.1 (3660.1)	136.3 (3462)	96.8 (2458.7)
23.1X26 R1 12PLY	18.4 (467.4)	19.9 (505.5)	140.6 (3571.2)	132.8 (3373.1)	100.1 (2542.5)

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.