

67MTX

4x4 TRACTOR
160 HP (119 KW) / 170 HP (127 KW)



Game Equipment LLC 3322 Hwy 308 Napoleonville, LA USA 70390-8904 Ph: 985-369-9292 Fax: 985-369-9595 www.gameeq.com


67MTX 4x4 TRACTOR 160 HP (119 KW) / 170 HP (127 KW)



Engine and transmission coolers with 8 fins per inch spacing reduce buildup of debris. Hood rolls up for easy cleaning.

Individual gauges and indicators simplify operation, troubleshooting, and repair.

GAME tractors are designed and manufactured from the ground up for the most demanding conditions the world has to offer. Industrial frames, belly pans, drivelines, powertrain components, and hitches are standard.

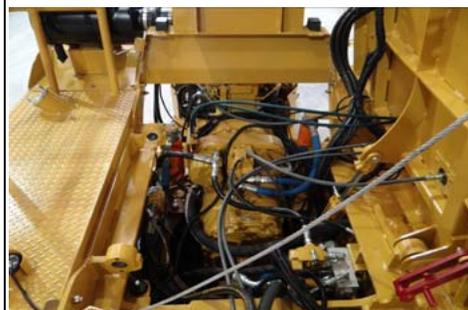

Tilting platform and hood provide unmatched access to engine, cooler and cab components. Both work via hand pump even when systems are down.

Hood profile provides excellent visibility.

Built to withstand extreme applications, the frame accommodates multiple hitch configurations for high weight transfer, winches, and other equipment.

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

67MTX 4x4 TRACTOR 160 HP (119 KW) / 170 HP (127 KW)

ENGINE

- Cummins QSB4.5, US EPA Tier III, EU Stage III electronic engine, 160HP (119 KW) @ 2,200 RPM with 168 HP (125 KW) @ 2,000 RPM bulge, Peak torque of 460 FT-LB (624 NM) @ 1,500 RPM
- Severe dust, dry dual stage air cleaner with service indicator and pre-cleaner
- Fuel/water separator with secondary fuel filter
- Large tropical radiator, transmission, and hydraulic oil coolers are 8 fins/inch and rubber isolator mounted
- 87-gal steel fuel tank with lockable cap and 12-inch clean out door
- Manual hydraulic tilting hood allows easy cleaning of coolers and service of engine and under hood parts

Export Only Option:

- John Deere 6068, 170HP (127 KW) @ 2,500 RPM, 447 LB-FT (606 NM) @ 1,200 RPM, mechanical fuel injection system

TRANSMISSION

- Manually controlled, converter driven, 4-speed powershift
- Powershift allows shifting under full engine power
- Spring applied hydraulic release parking brake on output shaft
- Separate cooler/system isolates transmission from hydraulic system contamination

Optional:

- 6-speed converter driven, electronically controlled powershift transmission

AXLES

- All wheels are powered
- Heavy duty, planetary, dual reduction
- Oscillating front axle, rigid rear axle
- No spin rear differential
- Internal oil bath service brakes
- Heavy duty mechanics drivelines

CHASSIS

- Heavy duty welded frame
- Double acting heavy duty hydraulic cylinders for steering
- Belly pans and front pull hook
- Painted with yellow gloss finish

STANDARD EQUIPMENT

- Engine oil pressure gauge and indicator
- Engine coolant temperature gauge and indicator
- Voltage gauge
- Fuel gauge
- Tachometer with hour meter
- Low hydraulic oil level light/indicator
- Transmission oil temperature gauge and indicator
- Transmission pressure gauge and indicator
- Oil filter service warning light
- Hand and foot throttle

ELECTRICAL

- (2) 12-Volt DC, 925 CCA, Group 31XHE heavy duty commercial batteries
- 12-Volt DC, 160-Amp alternator
- Horn, reverse alarm, and master disconnect switch
- Three LED headlights in hood (4th hood light in export only model)
- Two adjustable front and two rear/side LED work lights
- Two LED work lights in rear bumper
- Brake and indicator lights in rear bumper with warning lights top of cab (viewable front and rear)
- Strobe light

OPERATOR'S STATION

- Open station with welded steel canopy top
- Fully adjustable suspension seat with armrests
- Adjustable tilt steering column
- Manual hydraulic tilting platform

Optional:

- Air conditioned cab with AM/FM stereo

- Air suspension seat

HYDRAULIC SYSTEM

- Open center pump for brakes, steering, and implement valve
- 39-gal pressurized hydraulic tank with 100%filtration and 12-inch clean out door
- 2 bank, cylinder spools, open center valve
- Accumulator for emergency braking

MISC OPTIONS

- Rear windshield wiper & washer (with cab option)
- Cable operated 4-bank control valves
- Air compressor, tank, trailer park and service brakes via foot & lever
- 7-pin electrical connector capable of multiple trailer operation
- Hydraulic brake ports on rear for trailer
- Heavy duty fixed/swinging drawbar
- Heavy duty fixed/swinging drawbar with three hitch heights
- Welded rear extension with pintle hook
- Category II, 3-point hitch
- PTO
- Front push bumper and blades
- Electronic steering and mapping
- Operator tool set with lockable tool box
- Fire extinguisher
- First aid kit
- Drinking water container

TIRES




- 18.4 X 30, R1, 8-PLY front and rear tires
- Heavy duty one piece rims

Optional:

- 460/85R30, R-1W
- 18.4 X 30, R2, 10-PLY (export only)
- 480/70R38, R-1W (export only)


GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

67MTX 4x4 TRACTOR 160 HP (119 KW) / 170 HP (127 KW)

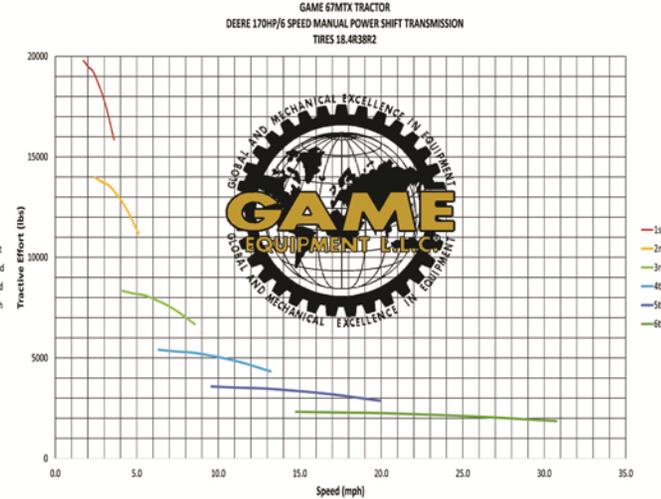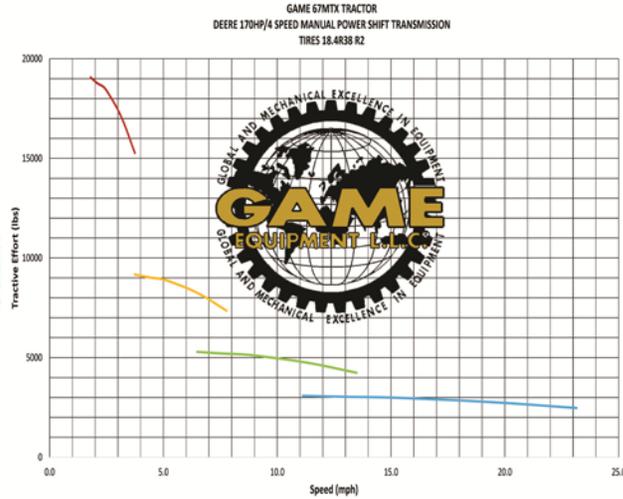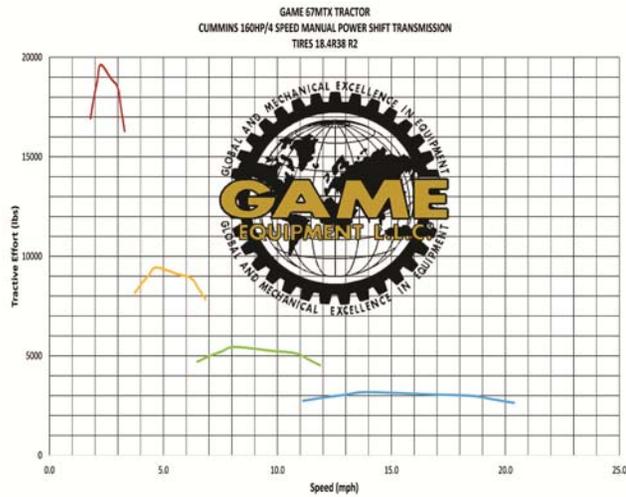

Specifications:

Unladen Weight Distribution 56% Front Axle, 44% Rear Axle
Tires 18.4 X 30 front and rear @ 78.5" track

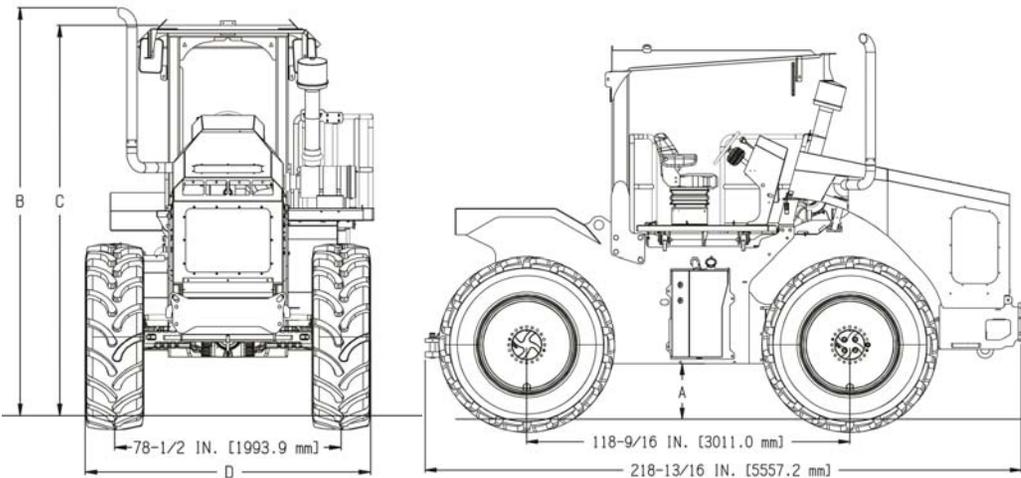

TIRE SIZE	A—IN(MM)	B—IN(MM)	C—IN(MM)	D—IN(MM)
18.4X30 R1 8PLY	20.5 (520.7)	141.7 (3599)	135.7 (3446.8)	93.7 (2380)
460/85R30 R-1W	20.3 (515.6)	141.5 (3594.1)	135.4 (3439.2)	97.2 (2468.9)
18.4X30 R2 10PLY	20.8 (528.3)	142 (3606.8)	136 (3454.4)	96.9 (2461.3)
480/70R38 R-1W	22.6 (574)	143.8 (3652.5)	138.3 (3512.8)	97.4 (2474)

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.