

95ATX

4x4 TRACTOR 475 HP (354 KW)



95ATX 4x4 TRACTOR 475 HP (354 KW)



GAME tractors are designed and manufactured from the ground up for the most demanding conditions the world has to offer. Industrial frames, belly pans, articulation, drivelines, powertrain components, and hitches are standard.



Multi-function electronic system monitor

Trimble system optional



Proportional controlled, hydraulically driven, reversing fan stays clean and saves fuel



Tilting cab provides unmatched access to powertrain and hydraulic components



Forward tilting hood provides unmatched access to engine coolers and other components

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

95ATX

4x4 TRACTOR 475 HP (354 KW)

ENGINE

- Caterpillar C15, Tier III electronic engine, 475HP (354 KW) @ 2,200 RPM with 512HP, (373 KW) @ 1,800 to 1,900 RPM bulge, Peak torque of 1,685 LBFT (2,286 NM) @ 1,400 RPM
- Severe dust, dry, dual stage air cleaner with service indicator pre cleaner with automatic dust ejector
- 390-gal steel fuel tank with lockable cap and 12-inch clean out door
- High capacity, 10-micron primary fuel/water separator, with dual 2-micron secondary fuel filter
- Large tropical radiator, transmission and hydraulic oil coolers are 8 fins per inch and rubber isolator mounted
- Manual hydraulic tilting hood allows easy cleaning of coolers and service of engine and under hood components

TRANSMISSION

- Electronically controlled, direct drive, 16-speed powershift, 4 reverse
- Multi-disc, oil immersed, spring applied/hydraulic release, driveline parking brake
- Separate cooler/system isolates transmission from hydraulic system contamination

AXLES

- All wheels are powered
- Heavy duty, dual reduction axles
- Ring and pinion reduction with planetary final drives
- No spin rear and limited slip front differentials
- Rear oscillating and front rigid axles
- Internal oil bath service brakes

TIRES

- (8) 710/70R38, R-1W
- Heavy duty flange mounted dual one piece rims
- Rim design allows for removal of outer tire/rim assembly without removing inner tire/rim assembly

Optional:

- (8) LSW710/60R46, R-1W
- (8) LSW800/55R46, R-1W

CHASSIS

- Heavy duty welded frame
- Articulating joint with heavy duty welded radial spherical bearings and large hardened pins
- Dual double acting heavy duty welded hydraulic steering cylinders with bushings
- Full belly pans and front pull hook
- Painted with yellow gloss finish
- Operating weight of 55,000-75,000 LB (24,948 - 34,019 KG)

STANDARD EQUIPMENT

- 6-inch color display for monitoring and diagnostics
- Engine oil monitoring and warning
- Engine coolant monitoring and warning
- Voltage monitoring
- Fuel gauge
- Tachometer with hour meter
- Hand and foot throttle
- Low hydraulic oil level buzzer/light
- Transmission oil temperature gauge and warning light
- Transmission clutch pressure gauge and warning
- Hydraulic and transmission oil filter service warning light

ELECTRICAL

- 12-Volt DC engine system, 160 Amp alternator
- 12-Volt DC roadway, turning, and warning lights
- (4) 12-Volt DC, 925 CCA, Group 31XHE heavy duty commercial batteries
- Master disconnect switch
- Horn
- Four adjustable LED headlights in hood
- Two adjustable front and two rear/side LED work lights
- Two adjustable LED work lights in rear bumper
- Brake and indicator lights mounted in rear bumper with warning lights top of cab viewable front and rear
- 7-pin electrical trailer connector and relays
- Strobe light

OPERATOR'S STATION

- Air conditioned cab with AM/FM stereo with USB, AUX and SD card
- Rear windshield wiper
- Manual hydraulic tilting platform for transmission and hydraulic component service
- Leather, heated, toggle link air suspension, 20-degree swivel fully adjustable seat with armrest designed for scraper applications

HYDRAULIC SYSTEM

- Open center pump for brakes and steering
- Priority hydraulic powered steering
- Open center pump for implement valve
- 91-gal pressurized hydraulic tank with 100% filtration via full flow spin-on canister type filters (91-gal capacity / 80-gal oil) and 12-inch clean out door
- 2 bank, cylinder spools, open center valve
- Accumulator for emergency braking
- Hydraulic brake ports on rear for trailer


MISC OPTIONS

- Cable operated 4 or 6-bank control valves
- Heavy duty drawbar
- Heavy duty scraper drawbar
- Closed center pressure comp pump with 4-bank electric control valve
- Closed center pressure comp pump with 6-bank electric control valve
- No control valve
- Electronic scraper control, steering, and mapping
- Front push bumper and blades
- 60,000-LB hydraulic winch rear frame mounted
- Operator tool set with lockable tool box
- Fire extinguisher
- First aid kit
- Drinking water container

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

95ATX 4x4 TRACTOR 475 HP (354 KW)

96 ATX Tractor Simulator
16 Speed Transmission
630 HP, 710/70R42, R-1W

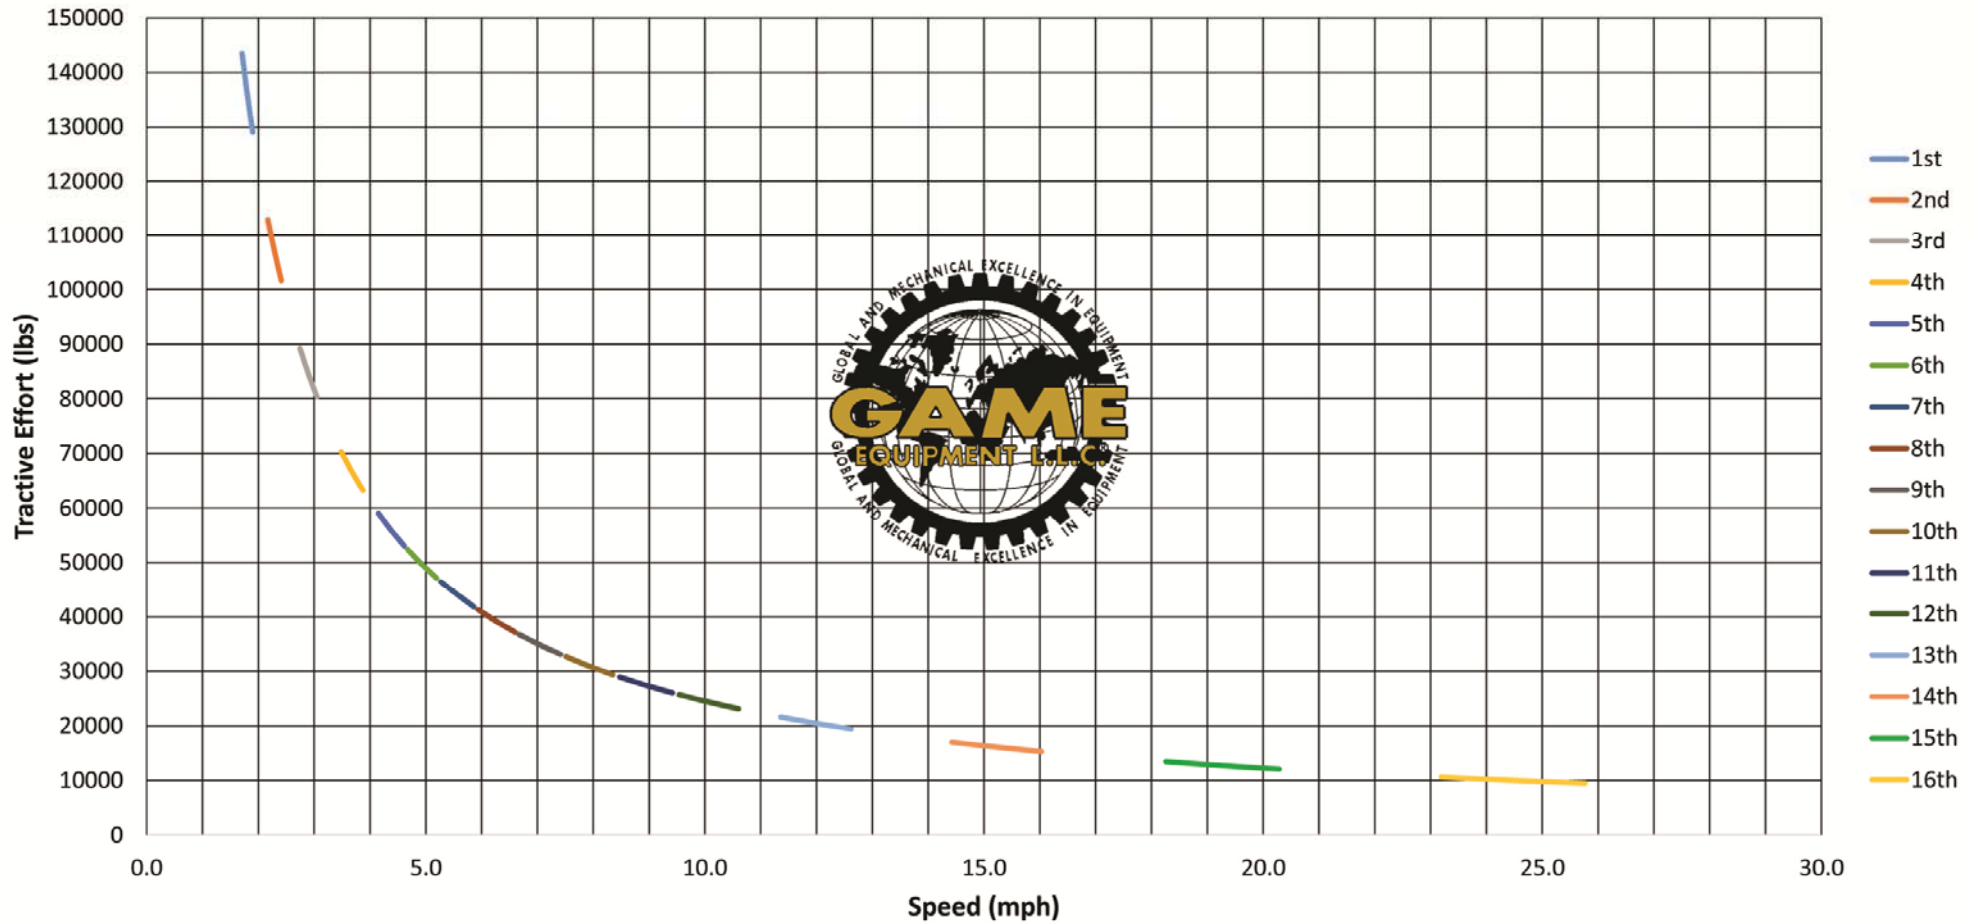

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.