
# **67ATX**

### 4x4 TRACTOR 160 HP (119 KW) / 170 HP (127 KW)




### 67ATX 4x4 TRACTOR 160 HP (119 KW) / 170 HP (127 KW)

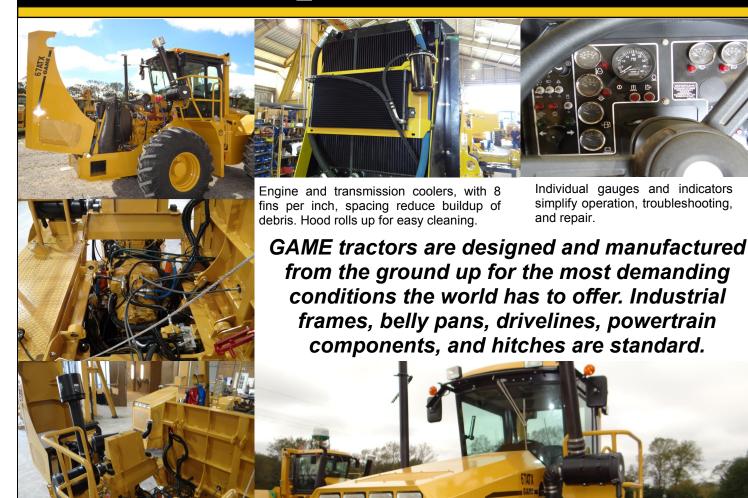

platform and hood provide unmatched access to engine, cooler and cab components. Both work via hand pump even when systems are down.

Hood profile provides excellent visibility.



GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

## 67ATX 4x4 TRACTOR 160 HP (119 KW) / 170 HP (127 KW)

#### **ENGINE**

- Cummins QSB4.5, US EPA Tier III, EU Stage III electronic engine, 160HP (119 KW) @ 2,200 RPM with 168 HP (125 KW) @ 2,000 RPM bulge, peak torque of 460 FT-LB (624 NM) @ 1,500 RPM
- Severe dust, dry dual stage air cleaner with service indicator and pre-cleaner
- Fuel/water separator with secondary fuel filter
- Large tropical radiator, transmission, and hydraulic oil coolers are 8 fins/inch and rubber isolator mounted
- 80-gal (300 liter) steel fuel tank with lockable cap and 12-inch clean out door
- Manual hydraulic tilting hood allows easy cleaning of coolers and service of engine and under hood parts

#### **Export Only Option:**

 John Deere 6068, 170HP (127KW) @ 2,500 RPM, 447 LB-FT (606 NM) @ 1,200 RPM mechanical fuel injection system

#### **TRANSMISSION**

- Heavy duty industrial, lock-up converter driven, mechanically controlled power shift. No electric solenoids, levers in cab shift transmission spools via mechanical cables
- Upshifts and downshifts while moving without foot actuated clutch. Multi disc clutch packs immersed in oil are oil actuated by shifts of manually actuated spools
- Independent oil cooler and system isolates contamination from all other sources providing long transmission life
- 4 forward and 4 reverse gears
- · Independent mechanical driveline parking brake

#### Optional:

 6-speed converter driven, electronically controlled powershift and automatic transmission

#### **AXLES**

- · All wheels are powered
- Heavy duty, outboard planetary, dual reduction
- Ring and pinion reduction with planetary final drives
- Limited slip front differentials
- No spin "Detroit locker" rear differentials
- Internal oil bath service brakes
- · Heavy duty mechanics drivelines

#### **CHASSIS**

- · Heavy duty, welded frame
- Articulating joint with heavy duty, radial spherical bearing and large hardened pins
- Dual double acting heavy duty welded hydraulic steering cylinders with bushings
- Full belly pans and front pull hook
- · Painted with yellow gloss finish

#### STANDARD EQUIPMENT

- Engine oil pressure gauge and indicator
- · Engine coolant temperature gauge and indicator
- Voltage gauge
- Fuel gauge
- · Tachometer with hour meter
- Hand and foot throttle
- Low hydraulic oil level light/indicator
- Transmission oil temperature gauge and indicator
- · Transmission pressure gauge and indicator
- Oil filter service warning light/indicator

#### **ELECTRICAL**

- (2) 12-VDC, 950 CCA, 180 RC Group 31XHE heavy duty maintenance free commercial batteries
- 12-Volt DC,160-Amp alternator
- Hom, reverse alarm, and master disconnect switch
- · Three LED headlights in hood
- Two adjustable front and two rear/side LED work lights
- Two LED work lights in rear bumper
- Brake and indicator lights in rear bumper with warning lights top of cab (viewable front and rear)
- Strobe light

#### **OPERATOR'S STATION**

- Open station with welded steel canopy top
- Vinyl mechanical suspension seat with position adjustment and armrests
- Adjustable tilt and telescopic steering column
- Manual hydraulic tilting platform

#### Optional:

 ROPS certified A/C cab with rear wiper, with AM/FM radio, marine grade, USB, AUX port and Bluetooth

- Training seat
- Leather, heated, toggle link fully adjustable air ride suspension seat with armrests, 20-degree swivel right, 60degree swivel left
- Electric cab/hood tilt

### HYDRAULIC SYSTEM

- Open center pump for brakes, steering, and implement valve
- 39-gal pressurized hydraulic tank with 100% filtration and 12inch clean out door
- 2 bank, cylinder spools, open center valve
- · Accumulator for emergency braking

#### MISC OPTIONS

- Cable operated 4-bank control valves
- Air compressor, tank, trailer park and service brakes via foot and lever
- 7-pin electrical connector capable of multiple trailer operation
- Hydraulic brake ports on rear for trailer
- · Heavy duty, fixed/swinging drawbar
- · Heavy duty, fixed/swinging drawbar with three hitch heights
- Welded rear extension with pintle hook
- Category III, 3-point hitch
- PTO
- Front push bumper
- Fire extinguisher

#### **TIRES**


- 18.4 X 30. R1. 8 PLY front and rear tires
- 78.5" (1.99M) track
- · Heavy duty one-piece rims

#### Optional:


- 460/85R30, R-1W
- 18.4X30, R2, 10 PLY
- 18.4X34, R1, 8 PLY
- 460/85R34, R-1W
- 18.4X34, R2, 12 PLY
- 18.4X38, R2, 8 PLY
- 23.1X26, R1, 12 PLY
- 23.1X26, R2, 12 PLY

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

## 67ATX 4x4 TRACTOR 160 HP (119 KW) / 170 HP (127 KW)

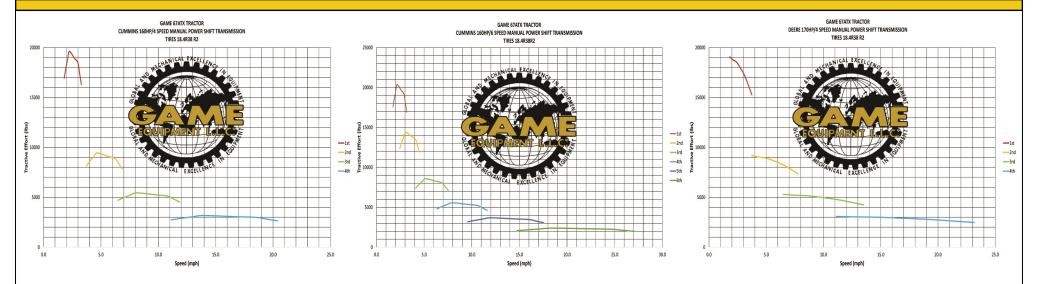



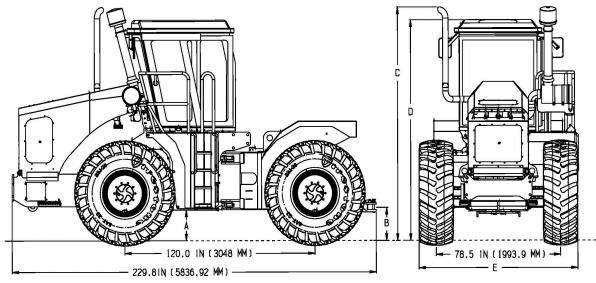

STANDARD TIRE SIZE	A—IN(MM)	B—IN(MM)	C—IN(MM)	D—IN(MM)	E—IN(MM)
18.4X30 R1 8PLY	17.4 (441.9)	18.9 (480.1)	139.6 (3545.8)	131.8 (3347.7)	96.8 (2458.7)

### **Specifications:**

**Unladen Tractor Weight......**16,000–20,000 LBS (7,257-9,072 KG)

Unladen Weight Distribution......58% Front Axle, 42% Rear Axle

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.