

4700LX

4700LX SUGAR CANE LOADER
220 HP (164KW) / 225 HP (168KW)



Game Equipment LLC 3322 Hwy 308 Napoleonville, LA USA 70390-8904 Ph: 985-369-9292 Fax: 985-369-9595 www.gameeq.com

4700LX

SUGAR CANE LOADER 220 HP (164KW) / 225 HP (168KW)

ENGINE

John Deere 6068T 203HP (151KW) @ 2,400 RPM , (225HP (168KW) 619 FT-LB (839NM) @ 1,400 RPM Intermittent), Net Power 195HP (143KW) @2,400 RPM, mechanical engine with inline pump Mechanical fuel injection system Severe dust, dry, dual stage air cleaner with service indicator and pre-cleaner Fuel/water separator with secondary fuel filter Large tropical radiator and oil coolers mounted on rubber isolators, 8 fins/inch spacing and swing out to ease cleaning Reversing cooling fan to clean coolers and screens 135-gal (510-liter) steel fuel tank with lockable cap and 12-inch clean out door Deck with handrails around entire engine, pumps, filters, coolers, and service area

Optional:

- Cummins QSB6.7, US EPA Tier III, EU Stage III 220HP (164KW) @2,200 RPM and 700 FT-LB (949 NM) @1,500 RPM

GROUND DRIVE

- (2) Heavy duty variable displacement Hydrostatic pumps and (4) two-speed heavy duty hydrostatic motors for wheel drives
- Rigid front and rear oscillating steering axle with heavy duty planetary final drives
- Spring applied hydraulic release parking brakes
- Infinitely variable operating speeds in forward and reverse
- All four wheels are powered full time
- Low speed range; 0 - 8.7 MPH/ 0 - 14 KPH
- High speed range; 0-18.6 MPH/ 0-30 KPH
- Independent 38gal tank and cooler

TIRES

Standard:

- 24.5X32, R1 12-ply front and 18.4X26, R1 12-ply rear (optional R2)

Optional:

- 30.5X32, R1 14 ply front and 23.1X26, R1 12 ply rear (optional R2)

Standard:

- 3.0 Meter track spacing

Optional:

- Axle spacers to move tracks to 3.3, 3.5, or 3.6 meters can be ordered to fit any new or existing unit

CANE HANDLING

- Oversized, standardized, pins and bushings at cylinder and pivot points
- 180-degree boom swing right and left, cushioned at both extremes
- Front mounted piler bar with 2.5in (63.50mm) adjustable mounting positions for tines
- Push piler

Optional:

- 10-chain piler

HYDRAULIC SYSTEM

- Closed center, pressure compensate, piston pump for steering, boom, and piler cylinder functions
- Priority hydraulic power steering
- Pressurized hydraulic tank 68gal (257 liters) 100% filtration and 12 inch clean out door

ELECTRICAL

- (2) 12-Volt DC, 925 CCA, Group 31XHE heavy duty commercial batteries
- 12- Volt DC, 160-AMP alternator
- (4) LED headlights
- (2) LED work lights in the rear, 2 per side, and one on boom
- One service deck light
- Turn signal and warning lights front and rear mounted on extendable arms

OPERATOR'S STATION

- AC cab with AM/FM stereo
- Fully adjustable suspension seat with armrests
- Adjustable tilt steering column
- Joystick controls for boom and grab
- Foot pedal control for ground drive
- Windshield wipers (front and sides) and mirrors

Optional:

- Air suspension seat

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.

4700LX

SUGAR CANE LOADER 220 HP (164KW) / 225 HP (168KW)



Large 1,750 Kg grab capacity increases efficiency.



Elevated cat walk with all around access to engine and cooling package components. Removable panels allow for easy access for maintenance.



Easy to use with lots of pushing power due to high HP hydrostatic drive train.

Plenty of room in cab for comfort and to limit fatigue.





GAME tractors are designed and manufactured from the ground up for the most demanding conditions the world has to offer. Heavy-duty industrial frames, belly pans, drivelines, powertrain components, and hitches are standard.

GAME Equipment reserves the right to change specifications without notice.



4700LX

SUGAR CANE LOADER 220 HP (164KW) / 225 HP (168KW)

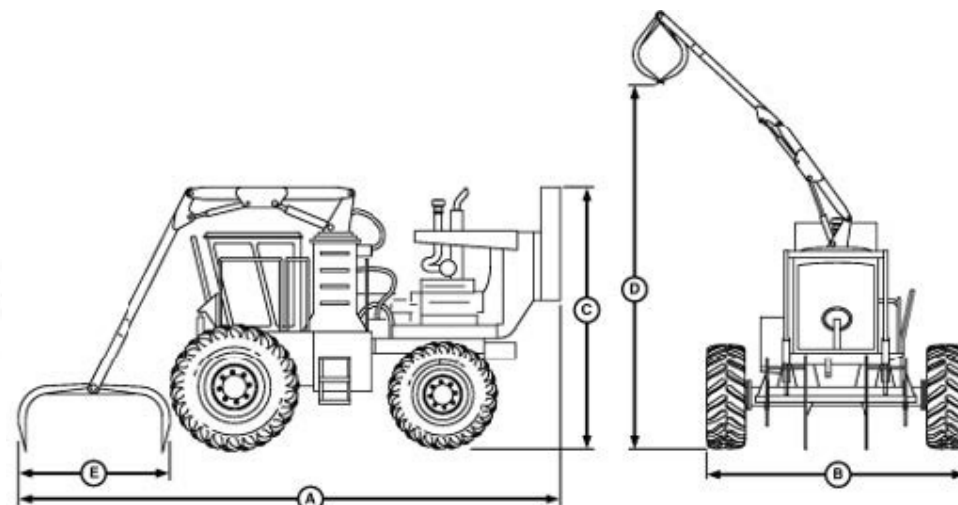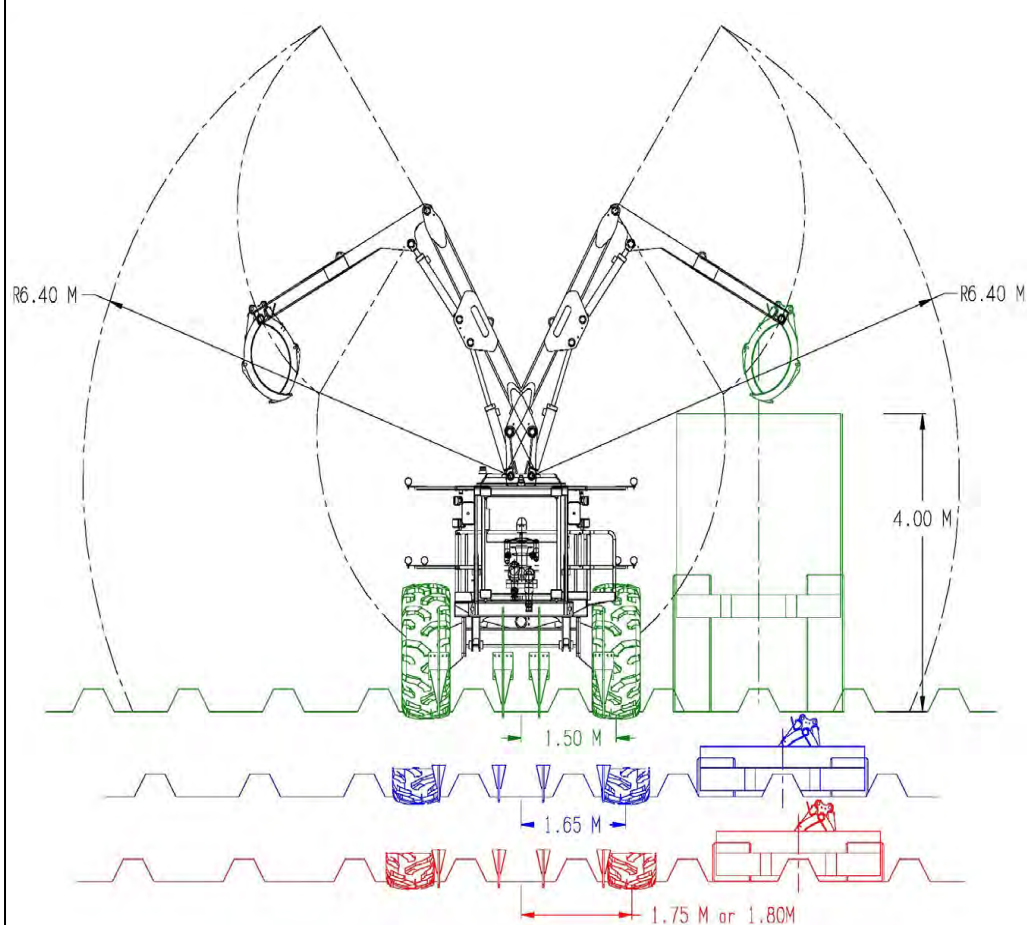

GAME 4700LX Loader Dimensions

A	Length	6.86 m (270 in.)
B	Width	3.68 m (145 in.)
C	Height (Boom Lowered)	3.90 m (154 in.)
D	Clearance under Grab	7.90 m (311 in.)
E	Grab Opening	1.78 m (70 in.)

Weight Specifications

Machine Weight (Gross)	10,885 kg (24,000 lb.)
------------------------	------------------------

GAME Equipment reserves the right to change specifications without notice. Some photos may contain optional equipment.